


Arco Plank Specifications			
Manufacturing Process	Tufted	Stair Suitability	No
Gauge	1/8" Cutpile	Colour Fastness to Light	> 5
Pile Yarn Composition	100% Type 6 Nylon	Colour Fastness to Water	> 4
Primary Backing	Non Woven	Colour Fastness to Rubbing, Dry / Wet	> 4
Backing	BT	Colour Fastness to Soiling	> 3.5
Tile Size	25 cm X 100 cm (9.8" X 39.3")	Electrostatic Charging	<2kV
Pile Weight	750 g/m <sup>2</sup>	Vertical Resistance	<1.0x10 <sup>8</sup>
Total Weight	3830 g/m <sup>2</sup> (+/-10%)	Horizontal Resistance	<1.0x10 <sup>8</sup>
Pile Height	3.9 mm	Impact Sound Protection	28 dB
Total Height	7.6 mm (+/-10%)	Thermal Resistance	0.157 m <sup>2</sup> .K/W
Overall Use Class	Commercial 33, Areas With Heavy Use	Flammability	Bfl,s1
Luxury Class	LC2	Prodis-ID (GuT)	E18BB887
Castor Chair Suitability	Yes, Permanent Use	AbZ Nr.	Z-156.601-1457
Slip Resistance	> 0.3 Machine Direction > 0.3 Cross Direction		

### Recommended Installation Methods:


**Plank size, 25cm X 100cm (9.85" X 39.3")**

**10 planks per box (2.5 m<sup>2</sup> per box)**


#### Brick

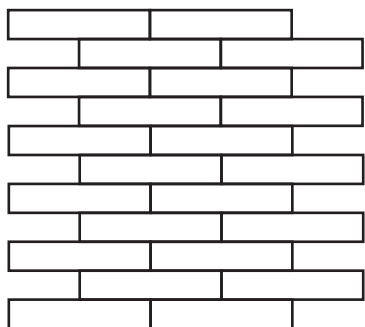


#### Stagger



#### Ashlar



#### Herringbone

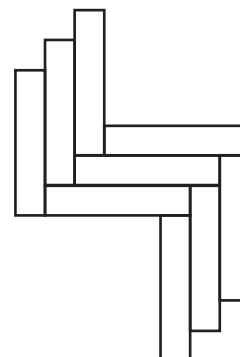

These products meet C.G.S.B. standards for flammability. (Methenamine pile Test)  
All Vifloor Canada Ltd. products meet ISO 9002 Certification.  
All Vifloor Canada Ltd. products contribute towards LEED certification.  
Product of Netherlands (E.U.)



Toll: 1-877-521-9014

[www.vifloor.com](http://www.vifloor.com)

10 Queen Elizabeth Blvd.

Unit 1, Toronto, ON

M8Z 1L8