


ClassicBac®

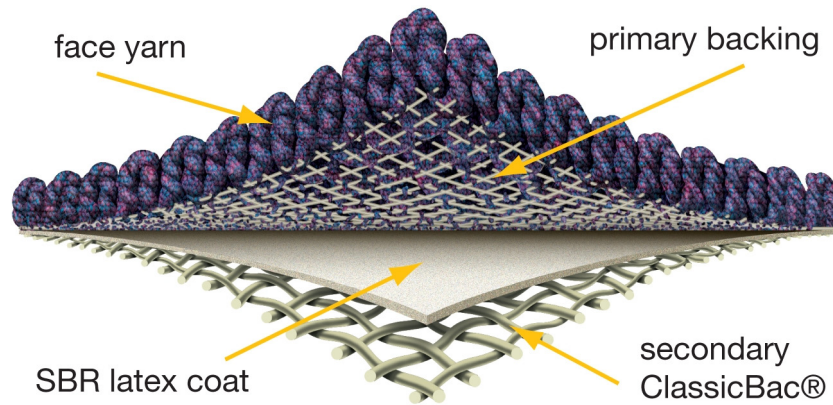

backing system	ClassicBac®
backing description	SBR latex precoat and secondary coat laminated to a woven secondary backing
backing process	3-step process <ol style="list-style-type: none"> 1. Direct application of SBR to back of carpet face. 2. Light coat of SBR latex to woven secondary backing. 3. Layers are joined at compression roller.
average thickness	.081 inch
primary	Synthetic
weight	35 oz/yd ² (average)
width	12 feet (standard); optional widths available
test	Radiant Panel Fire -Class 1 (based on pile construction) NBS Smoke < 450 TVOCs < 500 micrograms/sqm/hr (meets CRI Green Label requirements)
installation	Direct glued with Shaw Subset 1000 or Shaw Subset 2057 Shaw Advantage System (non-patterned carpet only)
warranty	10 year commercial
shaw information	call 1.800.441.7429 for personal assistance